



Aluma-Lyte™ Form Rails

(Aluminum Side Rails)

Handlift, Quick and Accurate

Sylvan Precast Systems

Tel. (800) 842-1990

or (503) 639-9000


email: info@sylvan-products.com

www.sylvan-products.com/precast



Features & Benefits

- Extremely Light Weight: Can be moved easily by hand. Fewer injuries.
- Great Savings: On set-up, transition time and material costs.
- Great Value: Economical Cost & Quick Turn Over = Fast ROI.

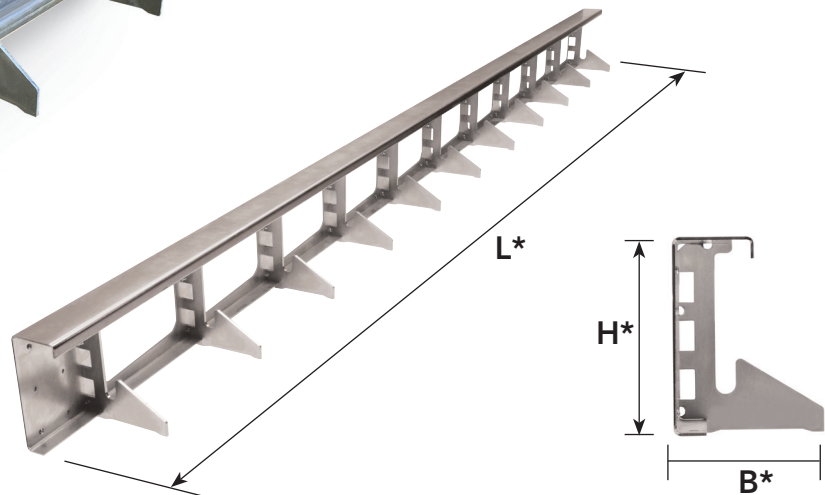

***See footnote about recommended faceplate heights (at bottom)

Product Description:

Aluma-Lyte™ Aluminum rails are less than half the weight of any other forms on the market. They are designed to work with Mag-Fly™ Power magnets or with wood adapter plates on wood forming beds. Offered exclusively across North America by Sylvan!

Height (H) inches (mm)*	Length (L) inches (mm)*	Breadth (B) inches (mm)*	Weight (lbs)**
4" (98 mm)	118" (9' 10") (3000 mm)	5.9" (150 mm)	12 lbs
6" (148 mm)			15 lbs
8" (198 mm)			17 lbs
10" (248 mm)		8" (200 mm)	19 lbs
14" (348 mm)			23 lbs
16" (398 mm)			25 lbs
		10" (250 mm)	

* Sizes are listed in U.S. customary units (Imperial) and are rounded to the nearest nominal inch. Additional custom sizes available as production schedules allow.

** Weights are rounded up to the nearest pound (lb.), and do not include the extra weight of the plywood or facing material.

*** Overlaid Plywood or Metal faceplates can generally be used up to 4-to-6 inches above the top of the rail height, depending on the thickness, species and grade of overlay plywood or the type/gauge of metal. 10' Overlay Plywood is available from Sylvan to make 10' sections, and 5 magnets can often be used for two 10' rail sections. (20')